


Installing Receiver to Glidermatic Motors

1. **TURN OFF POWER AND UNPLUG THE POWER POINT OF THE MOTOR – DO NOT PROCEED UNLESS THIS STEP IS COMPLETE**
2. Unscrew and remove the cover from the motor control wall unit.
3. View the diagram on the following page and ensure that it matches the control panel of your motor.
4. Plug in the black cable of the receiver to RPB1 on the motors control panel (circled and numbered 2 in the diagram).
5. Plug in the blue cable of the receiver to RPB2 on the motors control panel (circled and numbered 3 in the diagram).
6. Plug in the AC power pack of the receiver into a power point.
7. Ensure all cables are secured and are not loose. Plug back in the power to the motor and switch it on and switch on the AC power pack.
8. The remotes have been pre-programmed to button number 1. Press 1 to test the door.

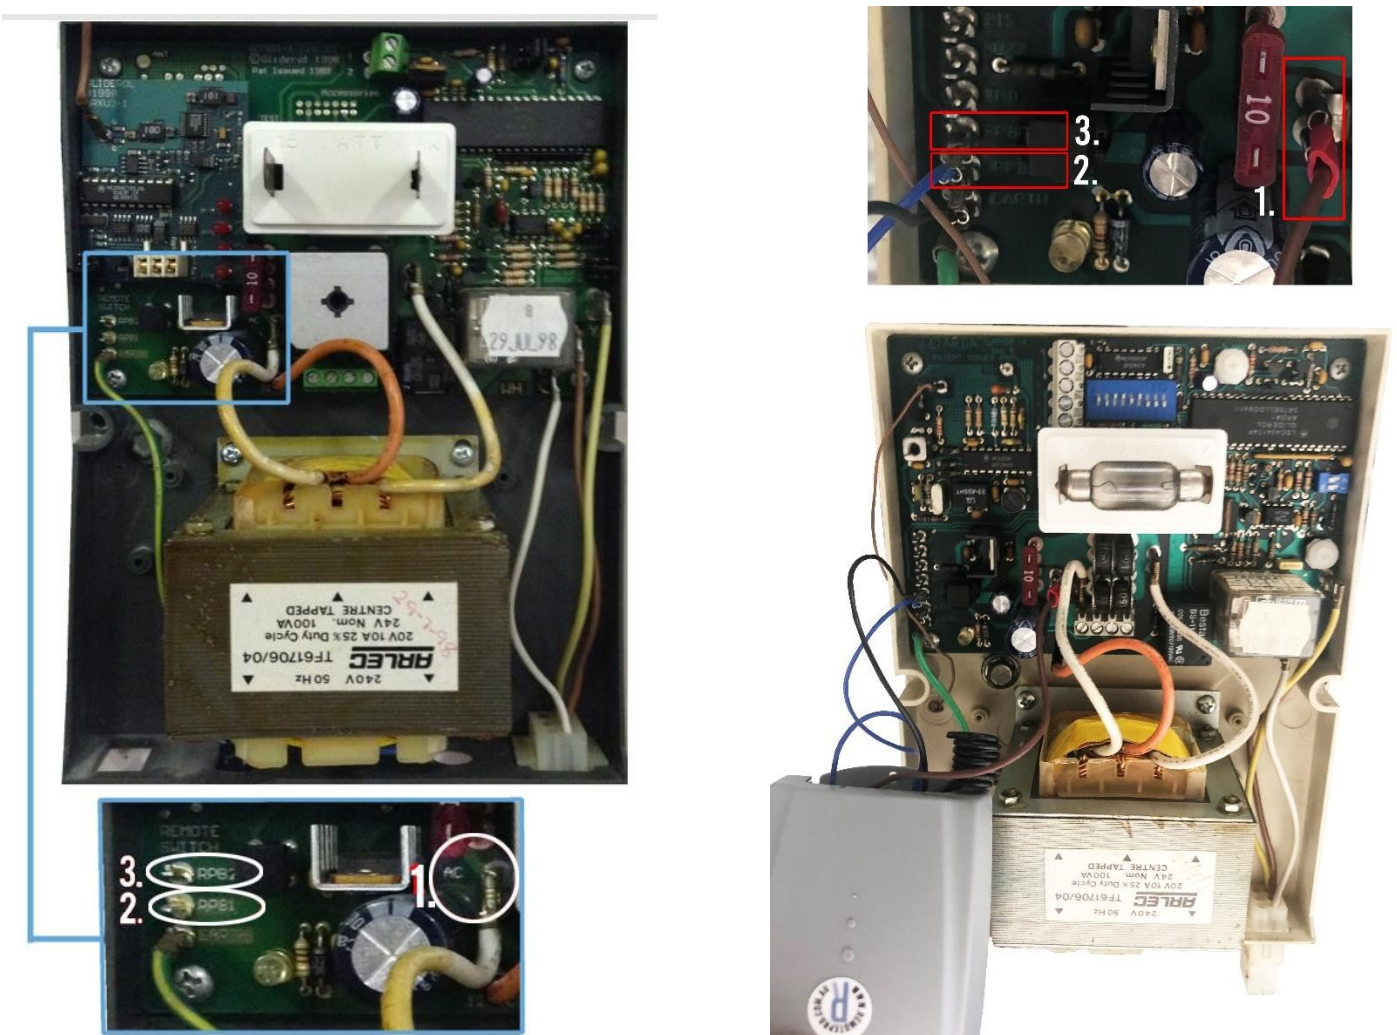

Coding new remotes

Please Note: Your original remotes will continue to work and the new remote have already been programmed

1. Press and immediately release the learn 1 button inside the receiver.
2. Press and hold any button on your new remote until the LED flashes on the receiver begins to flash
3. The remote is now coded, please test the remote to ensure it can operate the motor.
4. If you have more than one new remote, please repeat steps 1-3.

WARNING

To prevent possible SERIOUS INJURY or DEATH:
- Battery is hazardous: NEVER allow children near batteries.
- If battery is swallowed, immediately notify a doctor.
To reduce risk of fire, explosion or chemical burn:
- Replace ONLY with the same size and type battery
- DO NOT recharge, disassemble, heat above 100° C or incinerate
Battery will cause SEVERE or FATAL injuries in 2 hours or less if swallowed or placed inside any part of the body.

