


Programming a remote via the motor

1. Remove the cover of your motor to access the control panel (pictured below)
2. Press the Radio icon button on your motor located in the top left and press this button once and immediately let go (shown in the diagram below)
3. Hold down the button on the new remote that you would like to program to operate the motor until the top 5 led lights on the motor control panel flash then let go of the remote
4. Wait 30 seconds and test the new remote
5. Securely close the motor cover

PHASE 3

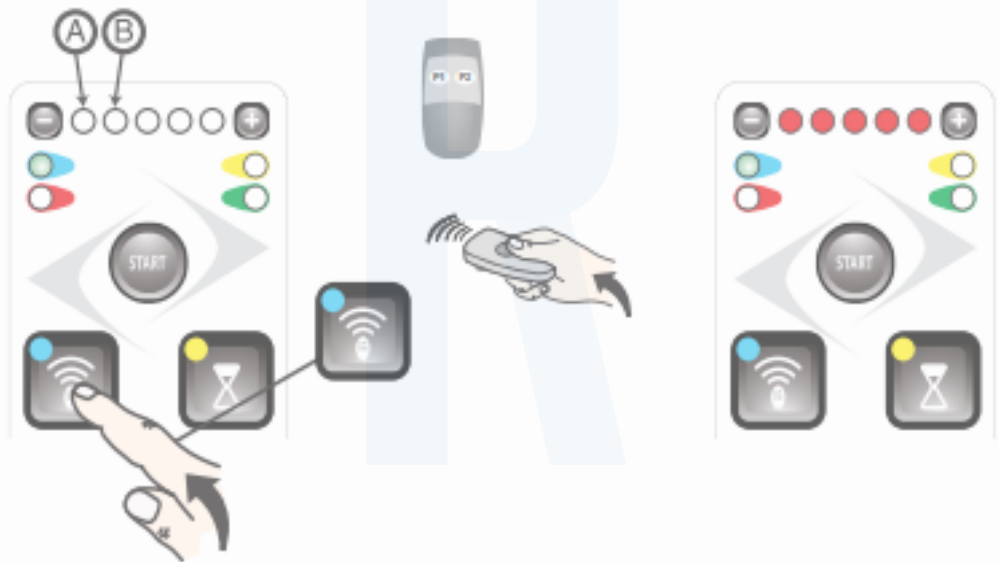

WARNING!

This product may contain a coin/button cell battery. Keep product and batteries away from children. Battery can cause severe or fatal injuries in 2 hours or less if swallowed or placed inside any part of the body. Seek immediate medical attention if it is suspected that a coin/button battery has been swallowed or placed inside of any part of the body.

