


1. Open the receiver/motor unit and locate the *J1* or Learn jumper pins.
2. Bridge the *J1* or Learn pins with the jumper located on the receiver board.
3. A red LED will illuminate on the receiver board to indicate the receiver is in learn mode.
4. Press the button you wish to operate the gate on the new remote and the LED on the receiver board will flash once to confirm that the new remote has been programmed.
5. If coding additional remotes, please repeat step 4.
6. Remove the jumper from the *J1* or Learn pins and place it back to its original position.
7. Test the remote to ensure it can operate the gate.

## Instructional Video:

[https://youtu.be/q\\_idHonxdLw](https://youtu.be/q_idHonxdLw)

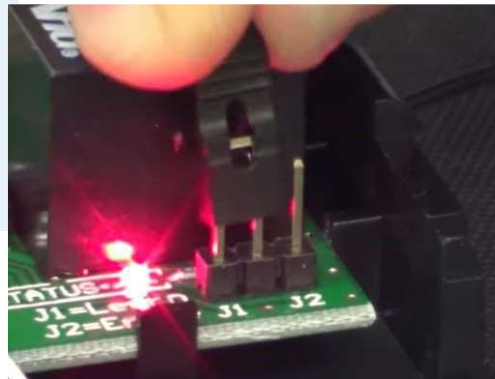

## D5 Instructional Video:

<https://youtu.be/HHjFUato1Ik>



### WARNING!

This product may contain a coin/button cell battery. Keep product and batteries away from children. Battery can cause severe or fatal injuries in 2 hours or less if swallowed or placed inside any part of the body. Seek immediate medical attention if it is suspected that a coin/button battery has been swallowed or placed inside of any part of the body.

