


Installing your new receiver to your CAD4 motor

1. **TURN OFF THE POWER FROM THE POWER POINT**
2. View the diagram below and ensure that it matches with the back of your motor.
3. Loosen each of the two screws 1 & 2 on the back of your motor.
4. Connect the black receiver cable to screw 1 and tighten.
5. Connect the blue receiver cable to screw 2 and tighten.
6. Connect the power adapter to a PowerPoint.
7. Turn the power back on and ensure the receiver powers up.
8. Your two new remotes have been pre-programmed to the receiver.
Press button 1 on your new remote to ensure it can operate the door.

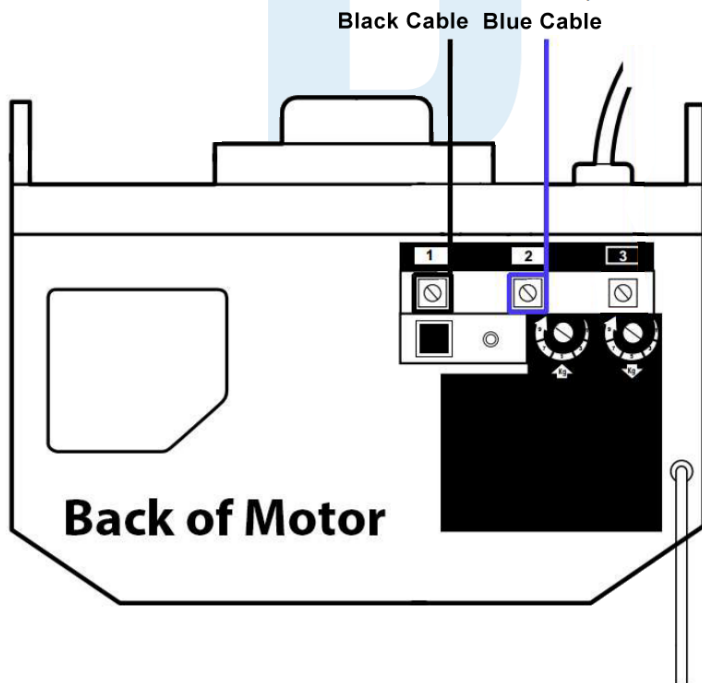

Programming new remotes to the receiver

Please Note: Your original remotes will continue to work

1. Press the black learn button inside the receiver located next to the LED light until the LED illuminates.
2. Press and hold any button on your new remote until the LED flashes 3 times.
3. The remote is now coded, please test the remote to ensure it can operate the motor.
4. If you have more than one new remote, please repeat steps 1-3.

WARNING

This product may contain a coin/button cell battery. Keep product and batteries away from children. A battery can cause severe or fatal injuries in 2 hours or less if swallowed or placed inside any part of the body. Seek immediate medical attention if it is suspected that a coin/button cell battery has been swallowed or placed inside of any part of the body.

