


## Programming your new remote to your D2 Turbo motor

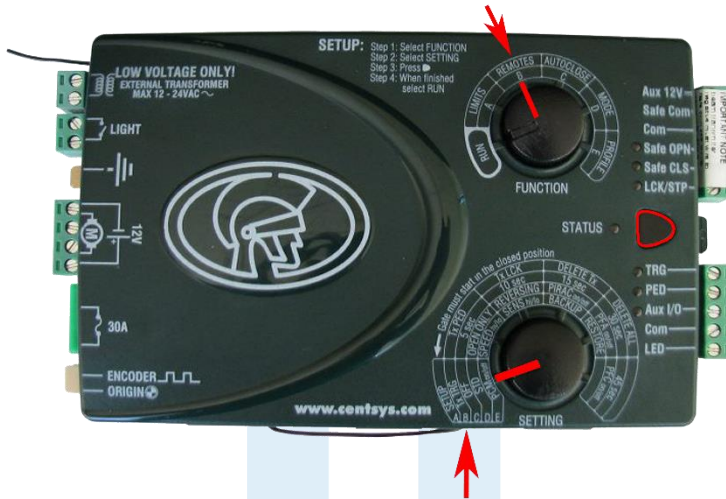

1. Rotate the Function Dial to REMOTES position (B), as shown above.
2. Rotate the Setting Dial to the “Tx TRG” selection along the ‘B’ row of options.
3. Press the pushbutton (highlighted in red above) to select the “TX TRG” setting. The Status LED light will change from red to green to confirm the setting.
4. Press any button on your new remote that you wish to operate your motor. The Status LED light will flash twice indicating that the onboard receiver has learned in the remote. The onboard buzzer will also pulse twice.
5. Return the Function Dial to the RUN position.
6. Test your new remote.

### WARNING

This product may contain a coin/button cell battery. Keep product and batteries away from children. A battery can cause severe or fatal injuries in 2 hours or less if swallowed or placed inside any part of the body. Seek immediate medical attention if it is suspected that a coin/button cell battery has been swallowed or placed inside of any part of the body.

