


Programming new remote into DCB05 control board

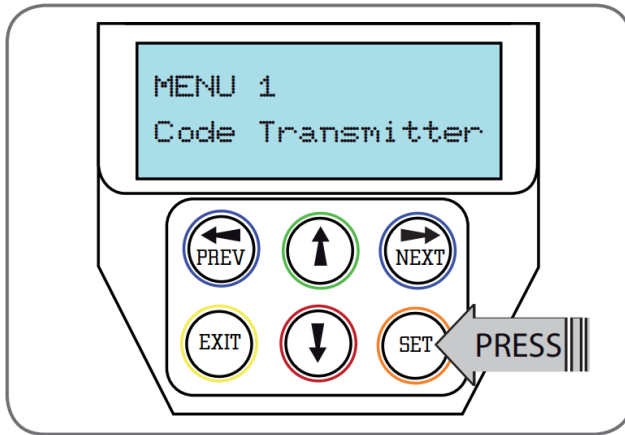

1. Press the “Next” button. The screen will display “Menu 1 Code Transmitter”
2. Press the “SET” button. The screen will display “Press TXR”
3. Press any button on your new remote for 2 seconds. The screen will display “Press TXR Again”.
4. Press the same button on your new remote again for 2 seconds.
5. Press the “SET” button.
6. Press the “EXIT” button.
7. Test your remote.

WARNING

This product may contain a coin/button cell battery. Keep product and batteries away from children. A battery can cause severe or fatal injuries in 2 hours or less if swallowed or placed inside any part of the body. Seek immediate medical attention if it is suspected that a coin/button cell battery has been swallowed or placed inside of any part of the body.

