


Programming a remote

1. Press and hold the S3 button on the PCB for 1 second. The blue LED light located on the RF board will illuminate.
2. Press the A button for a dual- gate installation and the B button for a single-gate installation on your new remote within 5 seconds.
3. Your remote has been successfully programmed once the LED light turns off.

Deleting the remote memory:

1. Press and hold the S3 button on the PBC for 3 seconds.

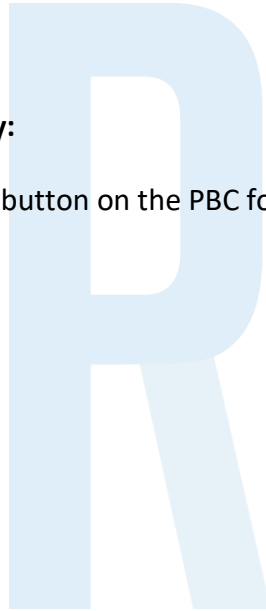

WARNING

This product may contain a coin/button cell battery. Keep product and batteries away from children. A battery can cause severe or fatal injuries in 2 hours or less if swallowed or placed inside any part of the body. Seek immediate medical attention if it is suspected that a coin/button cell battery has been swallowed or placed inside of any part of the body.

