


Nova Centsys Blue Instructions

1. Open the receiver/motor unit and locate the J1 or Learn jumper pins.
2. Bridge the J1 or Learn pins with the jumper located on the receiver board.
3. A red LED will illuminated on the receiver board to indicate the receiver is in learn mode.
4. Press the button you wish to operate the gate on the new remote and the LED on the receiver board will flash once to confirm that the new remote has been programmed.
5. If coding additional remotes, please repeat step 4.
6. Remove the jumper from the J1 or Learn pins and place it back to its original position.
7. Test the remote to ensure it can operate the gate.

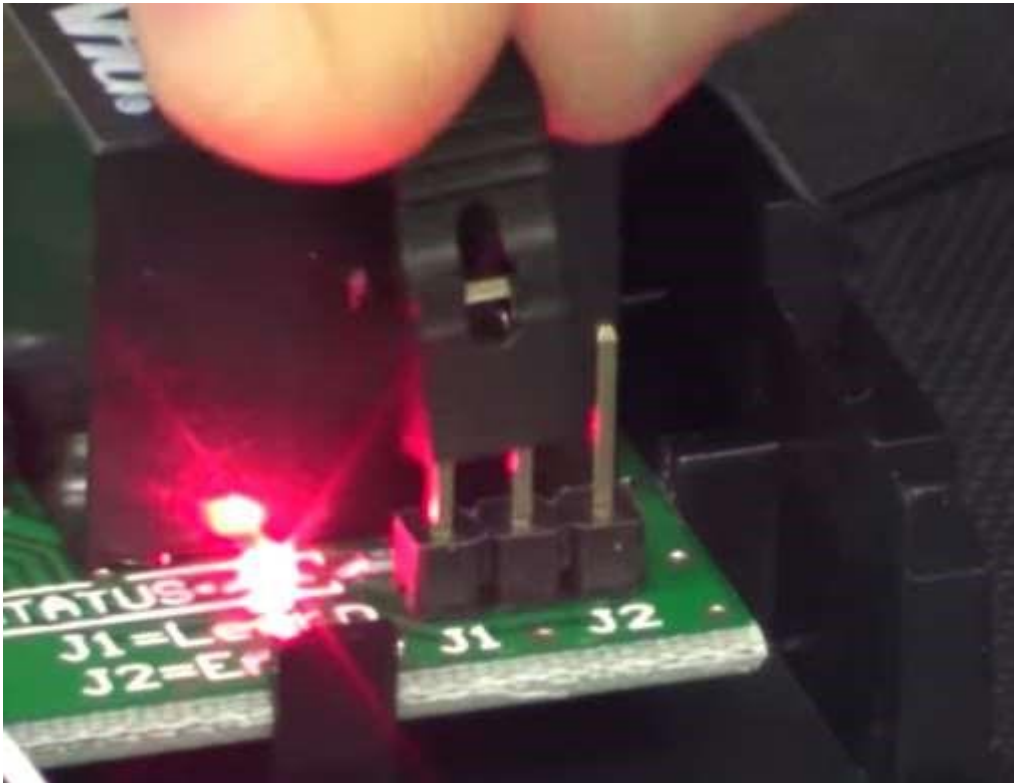

Video: https://www.youtube.com/watch?v=q_idHonxdLw

www.remotepro.com.au

WARNING

To prevent possible SERIOUS INJURY or DEATH:

- NEVER allow small children near batteries.
- If battery is swallowed, immediately notify a doctor.

To reduce risk of fire, explosion or chemical burn:

- Replace ONLY with the same size and type battery
- DO NOT recharge, disassemble, heat above 100° C or incinerate

